






MEDIUM VELOCITY SPRAY NOZZLES

INLET THREADS (M)	½" BSPT / BSP / NPT	¾" BSPT / BSP / NPT
K. FACTOR	24 28 31 36 41 45 51 57 61	66 71 76 81 86 91
SPRAY ANGLE	60° 75° 80° 90° 100° 110° 120° 140° 180°	
MATERIAL	BRASS IS:319 / SS : 304 / GLASS FILLED NYLON	
FINISH	BRASS / NICKLE / CHROMEPLATED	

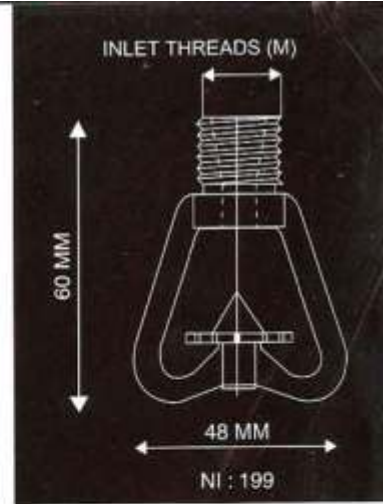

VERTICAL DISTRIBUTION PROFILE (AT 4 Kg/Cm² PRESSURE)

SPRAY PATTERN

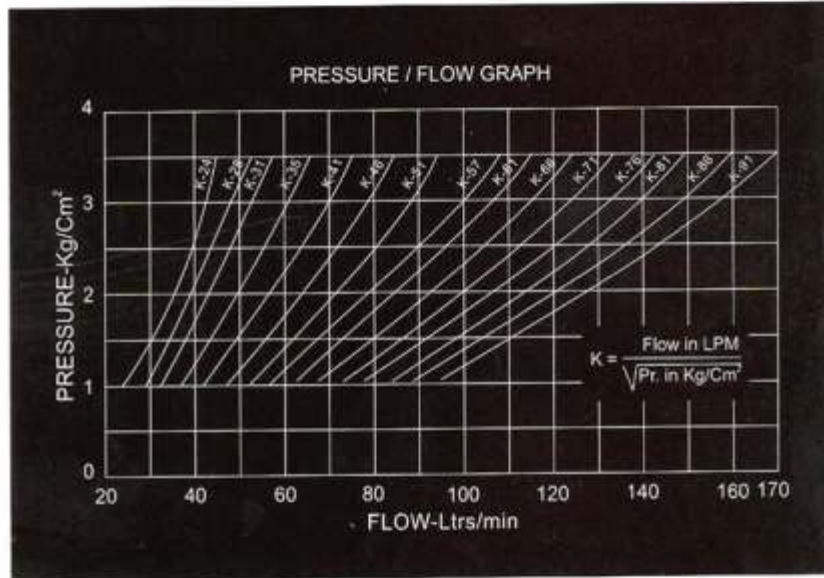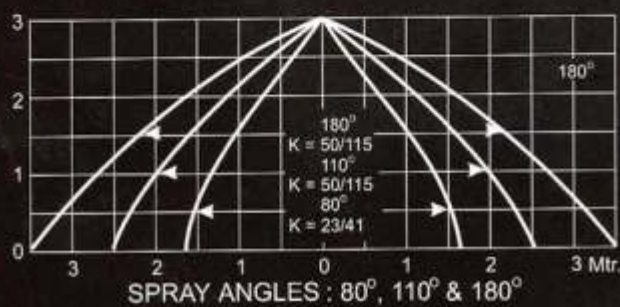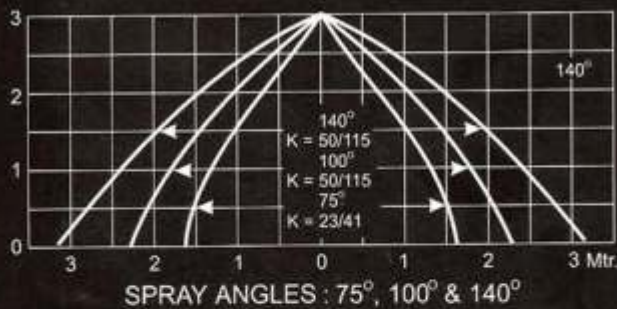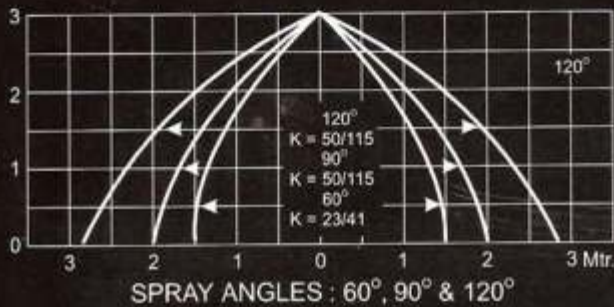

Also available in :
 ANY COMBINATION OF K. FACTOR & SPRAY ANGLE

NO NEWAGE INDUSTRIES FIRE PROTECTION ENGINEERS

ADMINISTRATIVE OFFICE :

7, CHAMPAKLAL UDYOG BHAVAN, SION (EAST), MUMBAI - 400 022 - INDIA.
 TEL. : + 91 (0) 22 - 2407 7421
 FAX : + 91 (0) 22 - 2407 1320 / 2407 4229
 E-MAIL : info@newage-india.com
 WEBSITE : www.newage-india.com

REGISTERED OFFICE & FACTORY :

AMBAWADI INDUSTRIAL ESTATE, SURENDRANAGAR - 363 001, GUJARAT - INDIA.
 TEL. : + 91 (0) 2752 - 243651 / 243652
 FAX : + 91 (0) 2752 - 243463
 E-MAIL : snr@newage-india.com